





**Reliance Industries, LLC**

**Operating instructions**

for

**In-Line Cable Clamp**

**Model # 6050 – Zinc Plated Steel**



**Reliance Industries, LLC**

**PO Box 140008**

**Denver, CO 80214**

**Ph. (800) 488-5751**

**Ph. (303) 424-8650**

**Fax (303) 424-8670**

## User Instructions

### 6050 Skyline™ In-Line Cable Clamp



Reliance Industries, LLC

## General Instructions

It is the responsibility of the employer, as part of a total fall arrest rescue and evacuation program, to retain the manufacturer's instructions and make them readily available to all users. The employer must provide adequate training in the proper use and care of this product prior to use.

### Manufacturer's name and address

Reliance Industries, LLC  
PO Box 140008  
Denver, CO 80214

Ph. (800) 488-5751  
Ph. (303) 424-8650  
Fax (303) 424-8670

### Part number and model designation

Model type: In-Line Cable Clamp  
Part number: Model # 6050 – Zinc plated steel  
Model # 6052 – Stainless Steel

Capability: To be used with 3/8"-7 x 19 IPS or stainless steel wire rope **ONLY**.  
Material: Steel with zinc plate and yellow chromate or stainless steel

Caution: Always certify, using a qualified person, that the cable to which the In-Line Cable Clamp is being attached to is 3/8"-7x19 wire rope and that the Horizontal Lifeline System which it is a part of has been designed by a qualified engineer, and will carry the intended loads per OSHA and ANSI standards.

### Intended use and purpose of the equipment

The In-Line Cable Clamp is intended to be used as an end termination means to secure the 3/8" – 7 x 19 IPS wire rope component of the Skyline™ Horizontal Lifeline System. It allows for the rapid adjustment of the Horizontal Lifeline length by attaching anywhere along the wire rope's length, providing a secure anchorage point without causing a permanent bending or deformation in the cable. Its' primary use is for temporary or portable systems where changes in span length are required. The In-Line Cable Clamps are proof load tested to 10,000 lbs.

Should a permanent system be needed, or a system in which the required cable length does not change, we recommend the use of the Open Wedge Socket, Part Number 6056; or the Combination Clamp, Part Number 6054.

## User Instructions

### 6050 Skyline™ In-Line Cable Clamp



Reliance Industries, LLC

#### Proper method of use

- The In-Line Cable Clamp is designed as an adjustable end termination that can be installed anywhere along the length of a 3/8" - 7x19 IPS wire rope cable to provide a rigid anchorage for one end of a Skyline™ Horizontal Lifeline System.

This system consists of a steel cable clamp plate attached to the anchorage plate with 4 bolts and a cap or pressure plate attached with 6 bolts that are removed to insert the wire rope into the clamp. These 6 bolts MUST be re-torqued to a minimum of 35 ft-lbs. after re-assembly.

#### Caution!

- Use only with included hardware. NEVER replace bolts with bolts of lower strength.
- Use only with 3/8" – 7x19 IPS or stainless steel wire rope.
- Do not install in corrosive environments that will cause degradation or corrosion of steel or zinc plated components unless using all stainless steel components.
- Use only with Skyline™ Horizontal Lifeline Systems, which have been approved or designed by a qualified engineer.
- Remove from service if clamp shows signs of wear or degradation. Some imprinting of the cable wires into the clamp after use is expected.
- Should the cable lays not exactly fit the lays in the clamp, slightly twist or untwist the cable until an exact fit is achieved.
- Torque all fasteners to a MINIMUM of 35 ft.-lbs.
- Always tighten bolts uniformly to assure even pressure and proper seating of the cable in the cable grooves.

This product should be used only according with these instructions and in accordance with all state, federal and local safety regulations. The worker must read, heed and understand all warnings and instructions called out in the labels and operating instructions prior to use. Any hazards to safe and proper operation must be eliminated prior to use.

All HLL systems must be designed, installed, and used under the supervision of a qualified person.

## **User Instructions**

### **6050 Skyline™ In-Line Cable Clamp**



**Reliance Industries, LLC**

All anchorages must be able to support the anticipated line tensions with a safety factor of at least 2 to 1.

The geometry of a HLL system must not allow the worker to free-fall more than 6 ft. before his lanyard begins to pull on the horizontal lifeline.

The allowable drop height of the horizontal lifeline is unregulated by OSHA except that it must not allow the worker to contact any obstacle or a lower surface beneath him.

NEVER use horizontal lifelines with non-shock absorbing lanyards or retractables.

Always have a qualified engineer verify that the HLL anchorages will support at least 2 times the anticipated load. Never use HLL systems that will give line tensions above 6250 lbs. for stainless steel wire rope, or 7250 lbs. for IPS wire rope. This is one half the ultimate cable strength.

The manufacturer is not responsible for damages resulting from an improper application of the product. Proper application also means considering the operating instructions, workplace geometry, workplace hazards and the conditions of inspection and maintenance.

The user must have a rescue plan, be trained in the use of this plan and the means at hand to implement it when using this equipment.

Damaged products and products having already been used for arresting a fall must be removed from service.

Whenever the structure to which this anchor clamp is attached is altered the suitability of the anchor clamp as an anchorage must be re-certified by a qualified person. This qualified person should conduct periodic inspections at least once yearly.

## User Instructions

### 6050 Skyline™ In-Line Cable Clamp



Reliance Industries, LLC

### Warnings

- **ALWAYS** consult a qualified person for anticipated line tension and minimum required clearances prior to designing, installing or using this system.
- **Do not alter or attempt to repair the equipment.**
- **Use equipment for intended purpose only.**
- **Do not use combinations of components or subsystems, or both, which may affect or interfere with the safe function of each other.**
- **Do not expose equipment to chemicals, which may produce a harmful effect. Consult the manufacturer in cases of doubt.**
- **Do not use HLL equipment around moving machinery and electrical hazards. Do not use HLL equipment near sharp edges and abrasive surfaces. Avoid exposure to physical and chemical hazards, which the product is not designed to withstand.**
- **Be aware of, and protect the workers from swing fall hazards and objects below the walking working surface that may become impact hazards in case of a fall.**
- **Only approved safety devices that comply with ANSI Z359.1 and OSHA regulations may be used with this product.**
- **Follow all limitations regarding the use of this In-Line Cable Clamp as outlined in the section “Proper Method of Use.”**

# User Instructions

## 6050 Skyline™ In-Line Cable Clamp



Reliance Industries, LLC

### Method of Installation for In-Line Cable Clamp Model # 6050/6052

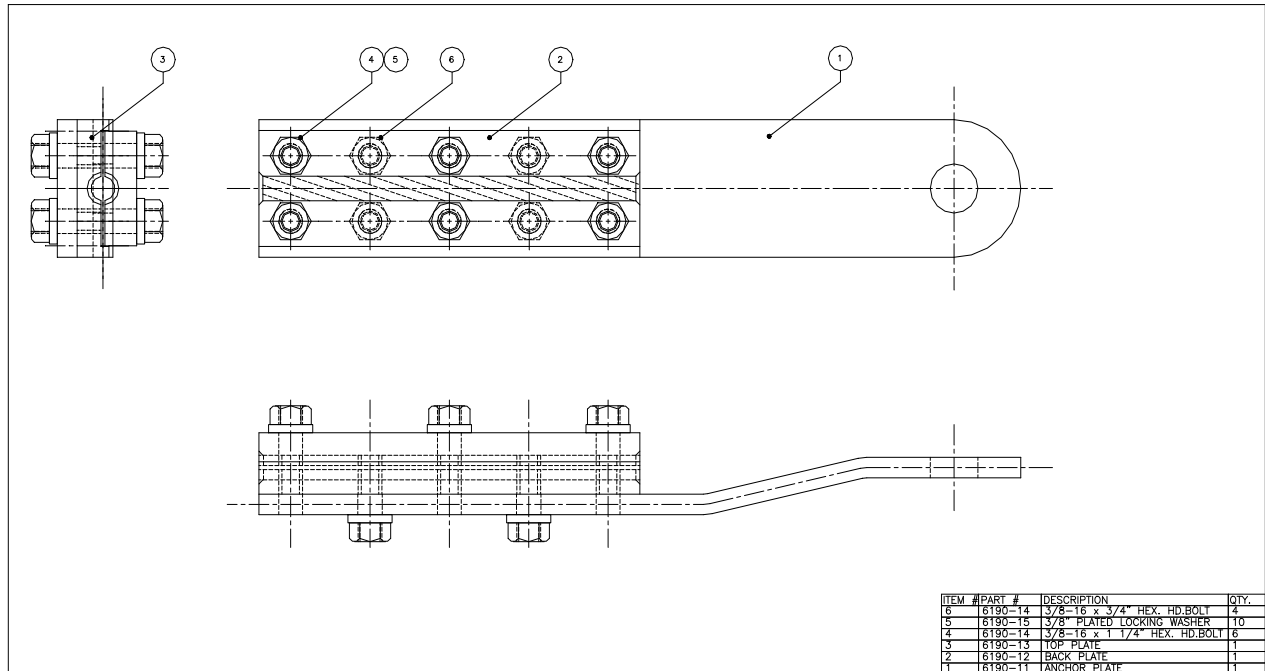


Figure 1

1. Remove the 6 bolts in the cap (top) plate (see Figure 1) and remove the cap plate from the cable clamp.
2. Lay the cable into the clamp (bottom) plate. Slide the cable back and forth to align the cable lays with the grooves and then push the cable lays into the grooves in the bottom plate. Should the lays not align exactly, twist or untwist the cable slightly until a match is achieved.
3. Replace the cap plate over the cable and re-install the 6 clamp bolts. While holding the cap plate down tightly, replace and tighten evenly the 6 clamp bolts. The cap plate should set flat and square on top of the cable. Begin torqueing the clamp bolts alternately and evenly until a torque of 35 to 40 ft.-lbs. is achieved. When using the Stainless Steel Cable Clamp, Model # 6052, always lubricate the bolts with a heavy grease or anti-seize compound prior to use.
4. Always leave at least 2 ft. of cable extending beyond the cable clamp and install a wire rope clip to the cable end for added safety.

## **User Instructions**

### **6050 Skyline™ In-Line Cable Clamp**



**Reliance Industries, LLC**

## **Inspection, Maintenance and Storage**

The user of this product is responsible for conducting periodic inspection, maintenance and identification of possible repairs that must be made. The user shall inspect equipment before each use to ensure that the equipment is in serviceable condition and operating correctly.

A yearly inspection of this product should be performed by a qualified person capable of determining the suitability for use.

In addition to the above inspections, the product must be checked for possible damages after any fall arrest load has been applied and is to be examined by an expert who must then decide if the product is suitable for further use.

The user must remove equipment from field service that has been subjected to a fall arrest. An authorized inspection is then required to determine if the product is suitable for further use.

When any inspection reveals defects in, damage to, or inadequate maintenance of equipment, the equipment shall be tagged as “UNUSABLE” and be permanently removed from service or undergo adequate corrective maintenance by means of an authorized repair before being returned to service.

The most common defects for example, are:

- Loose attachment hardware
- Absence of any elements affecting the equipment form, fit or function
- Evidence of defects in or damage to hardware elements including cracks, sharp edges, deformation, corrosion, chemical attack, excessive heating, alteration and excessive wear
- Improper attachment to cables that may create crushed ridges in the cable clamp, thus reducing clamp strength.
- Broken or missing clamp bolts.

When not in use, this equipment must be stored in a dry and clean place away from direct sunlight in a manner as to preclude damage from environmental factors such as heat, light, excessive moisture, chemicals and their vapors or other degrading elements.

## **Cleaning**

Product may be cleaned with soap and water or solvents that do not contain chlorine or chemicals corrosive to steel or zinc.

**User Instructions**  
**6050 Skyline™ In-Line Cable Clamp**



**Reliance Industries, LLC**

**Formal Inspection**

**Buyer/client:**

**Product description:** In-Line Cable Clamp      **Model No.** \_\_\_\_\_

**Year of manufacture:**

**Date of purchase:**

**Date of first use:**

**Name of user:**

This formal inspection grid and log has to be filed at the buyers department of occupational health and safety and is to be sent along with the product for the annual formal inspection through a competent person. Only completely inspected products are subject of the product warranty and liability of the distributor and manufacturer.

**Inspected according to specifications outlined by manufacturer:**

By:	Date:	By:	Date:
Stamp	Signature	Stamp	Signature
By:	Date:	By:	Date:
Stamp	Signature	Stamp	Signature
By:	Date:	By:	Date:
Stamp	Signature	Stamp	Signature

The inspector confirms with his signature the compliance of his inspection with all specifications as outlined by the manufacturer and as required by standards and regulations pertaining to occupational health and safety and fall protection.



**User Instructions**  
**6050 Skyline™ In-Line Cable Clamp**



**Reliance Industries, LLC**

**Checklist**

**In-Line Cable Clamp Model No.: 6050 / 6052**

	1. Year	2. Year	3. Year	4. Year	5. Year	6. Year
	Date	Date	Date	Date	Date	Date
By a qualified person:	Inspector	Inspector	Inspector	Inspector	Inspector	Inspector

**Cable Clamp:**

No missing parts						
No Corrosion						
No deformation						
Functioning condition						
No changes to attachment structure						

© Copyright by Reliance Industries, LLC - Excerpts and duplication of this formal inspection grid and log only with prior consent