


SKYLOC® 4030/4050 Self Retracting Lifelines

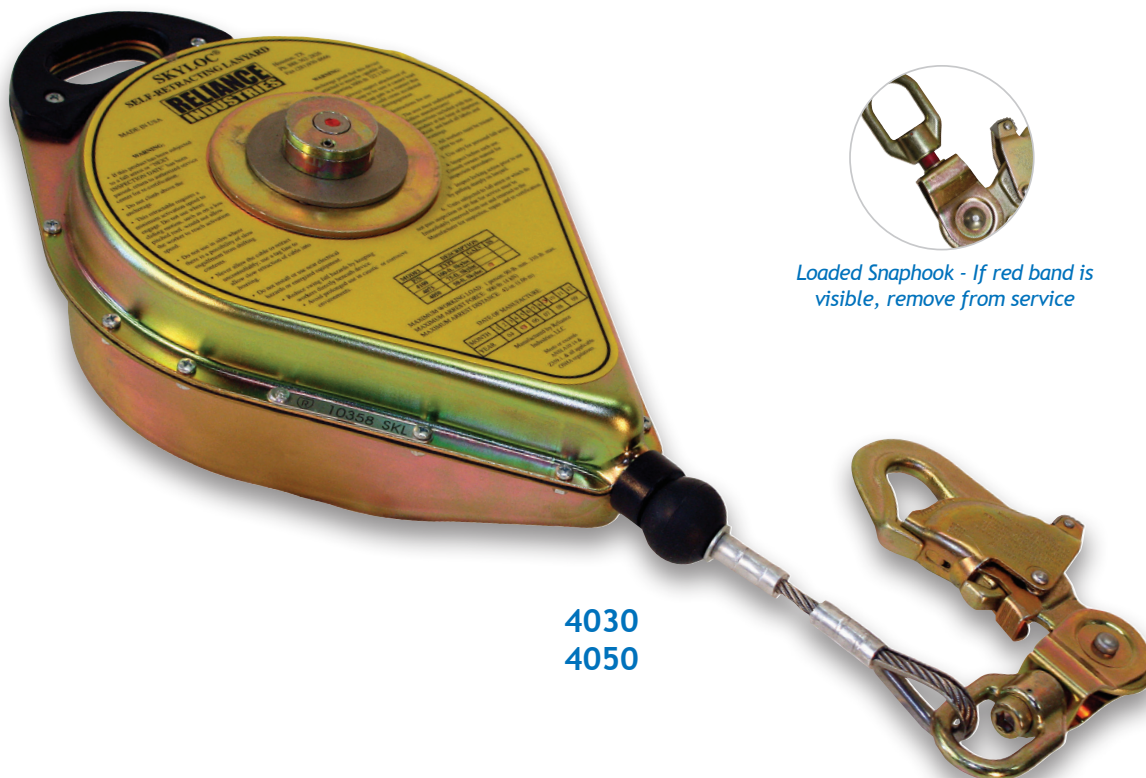

Loaded Snaphook - If red band is visible, remove from service

4030
4050

Skyloc™ Self Retracting Lifelines

Self Retracting lifelines are among the best options for both fall arrestor and deceleration devices. Skyloc™ self retracting lifelines are designed to arrest a fall in 2' (.6m) or less and limit the maximum arresting force (MAF) to 900 lbs (4 kN) Deceleration distance will not exceed 42" (1.1m). With short fall arrest distances and lower MAF's the Skyloc™ is the best option where fall clearance is a concern.

Product Features

- Heavy-duty zinc plated full steel case
- Three fast and positive cam-driven locking pawls.
- Brass and stainless-steel brake for long life and consistent operation
- Available with Galvanized or Stainless aircraft cable
- Forged steel Pelican hook with load indicating swivel prevents false engagement

Available Models

Part #	Length	Weight	Case	Line	Hook
4030	30' (9.1m)	25 lbs (11.3 kg)	Steel	3/16" (4.5mm) Galvanized Cable	3007
4050	50' (15.2m)	26.8 lbs (12.1 kg)	Steel	3/16" (4.5mm) Galvanized Cable	3007

Warnings

Read user manual and labels before use. Failure to observe instructions could result in injury or death. Inspect SRL before each use. If this product has been subjected to a fall arrest load, return to an authorized service center for recertification. This retractable requires a minimum activation speed. Do not use where sliding motion would not reach activation speed. Do not install or use near electrical hazards or energized equipment. Reduce swing fall hazards by keeping workers directly beneath device. Always inspect attachment of snap to be sure it cannot load snap gate in a manner that could create an accidental disengagement. Never allow the SRL to retract uncontrollably; use a tag line to allow slow retraction of line into the housing. Do not allow the wire rope to come into contact with sharp surfaces that could damage the cable. Do not climb above your anchorage point.

