



### Leading Edge Self Retracting Lifeline

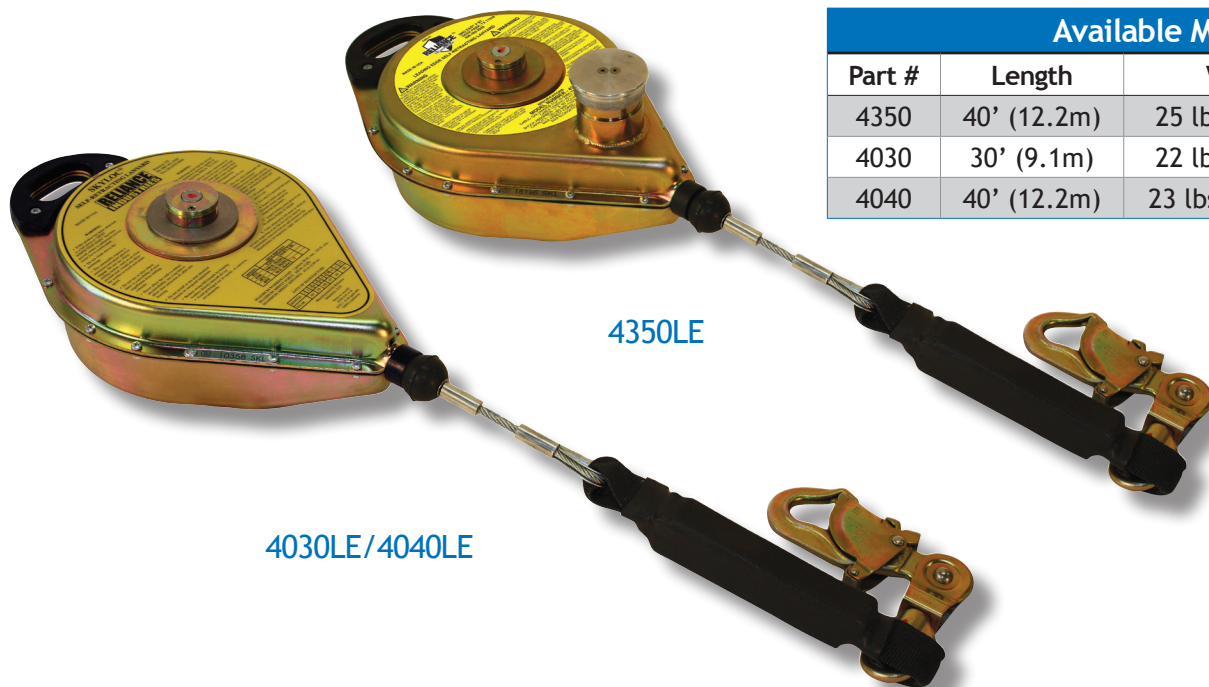

Available Models			
Part #	Length	Weight	Hook
4350	40' (12.2m)	25 lbs (11.3 kg)	3007-1
4030	30' (9.1m)	22 lbs (9.97 kg)	3007-1
4040	40' (12.2m)	23 lbs (10.43 kg)	3007-1

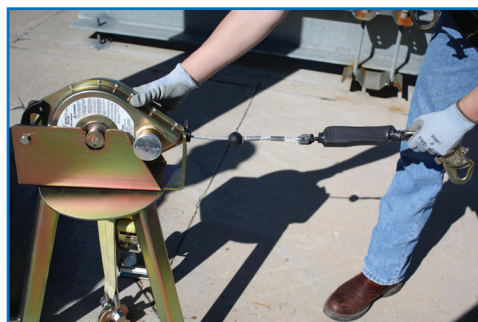

#### Product Features

The 4XXX LE series is designed specifically for leading edge work. The 4350 can be used as a standard self retracting lifeline, but features a lock-off control that turns the SRL into an adjustable length restraint device.

#### Specifications

- 7/32" (12.2m - 5.3mm) Galvanized cable
- External shock pack for added security
- MAF will not exceed 1,350 lbs (6kN)
- Load indicating swivel snap hook
- Deceleration distance will not exceed 54" (1.4m)
- Optional Swivel mounting bracket available

#### Warnings

Read user manual and labels before use. Failure to observe instructions could result in injury or death. Inspect SRL before each use. If this product has been subjected to a fall arrest load, return to an authorized service center for recertification. This retractable requires a minimum activation speed. Do not use where sliding motion would not reach activation speed. Do not install or use near electrical hazards or energized equipment. Reduce swing fall hazards by keeping workers directly beneath device. Always inspect attachment of snap to be sure it cannot load snap gate in a manner that could create an accidental disengagement. Never allow the SRL to retract uncontrollably; use a tag line to allow slow retraction of line into the housing. Do not climb above your anchorage point.

