

Product Data Sheet


Reliance 3004, 3005, 3014 Snaphook Specifications

Part #3005



Materials:	Body– Forged 4140 Alloy Steel Heat Treated to 35-42 Rockwell C
	Gate– Stamped & Formed 4130 Alloy Steel Heat Treated to 35-42 Rockwell C
	Springs– Stainless Steel Spring Wire
	Rivets– Stainless Steel
	Thumb Pull– Stainless Steel Powdered Metal
Plating:	15 Micron Minimum Zinc Plate with Yellow Chromate and Silica Seal
Performance:	5000lbs Minimum Tensile Strength
Testing:	100% Proof Loading to 3600lbs

Part # 3004

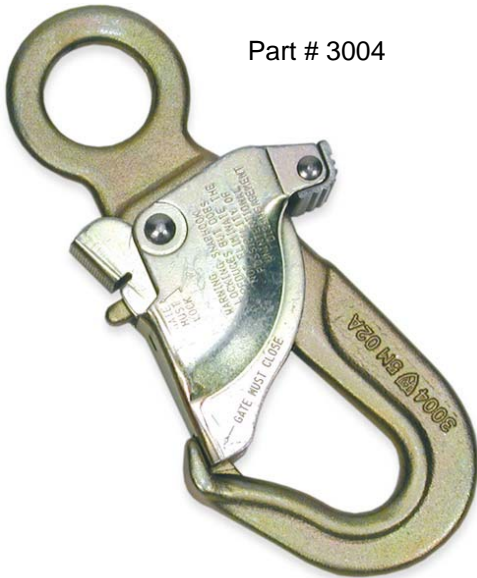

Part # 3014



Reliance Industries L.L.C.

P.O. Box 2046

Deer Park, TX 77536

Toll Free 888-362-2826 · Fax 281-930-8666

Visit us at www.relsafe.com

RELIANCE
INDUSTRIES