


Product Data Sheet

3066-1 & 3068-1 Bolt / Weld on D-Ring Anchor

The 3066-1 and the 3068-1 D-Ring Anchor Plates are designed for permanent installation on various structures. It provides a means of attaching a personal fall arrest anchorage in locations where other forms of tie-offs may not be possible.

This product is designed as a single person anchor point. All components supplied from Reliance meet the strength and design requirements outlined in ANSIZ359.1-1992 and all applicable OSHA standards.

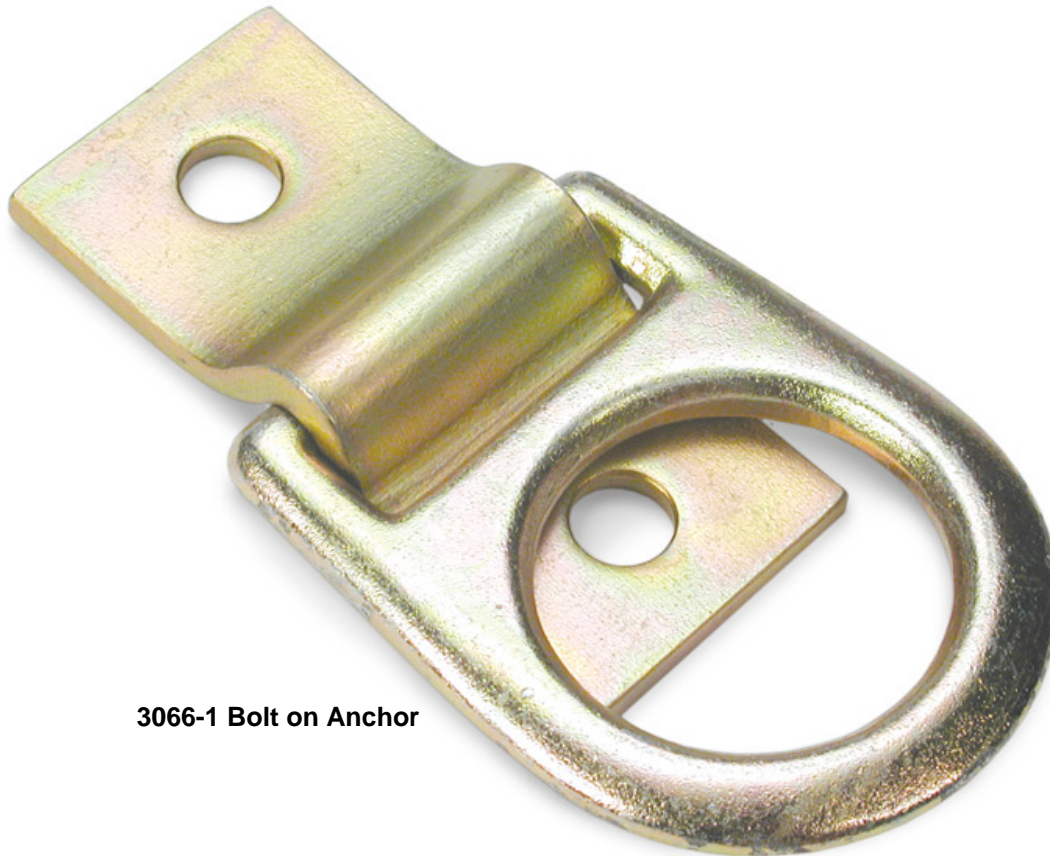

3066-1 Bolt on Anchor

Specifications

Bolt on version: 3066-1
Weld on version: 3068-1

Rated Strength:
5000lbs

Number of Users:
1

Materials:
D-Ring: 14K lbs Zinc
Plated Forged Steel

Anchor Plate: Formed Al-
loy Steel.

Use Orientation:
Vertical
Horizontal

Hole Diameter:
17/32"

Distance Between Holes:
3" OC

Note's :
Although designed as a single user 5000 lbs anchor point. It is the users responsibility to insure proper installation and sufficient structural support to safely accommodate this product.

Minimum Grade 5 hardware for bolt on application is not included with this product.

For complete installation requirements, contact Reliance Industries.

Reliance Industries L.L.C.

P.O. Box 2046

Deer Park, TX 77536

Toll Free 888-362-2826 · Fax 281-930-8666

Visit us at www.relsafe.com

RELIANCE
INDUSTRIES